


# Overhead Retractable Ladder®

*Retractable elevator ladder to enable access to overhead machine or platform for MRLs*

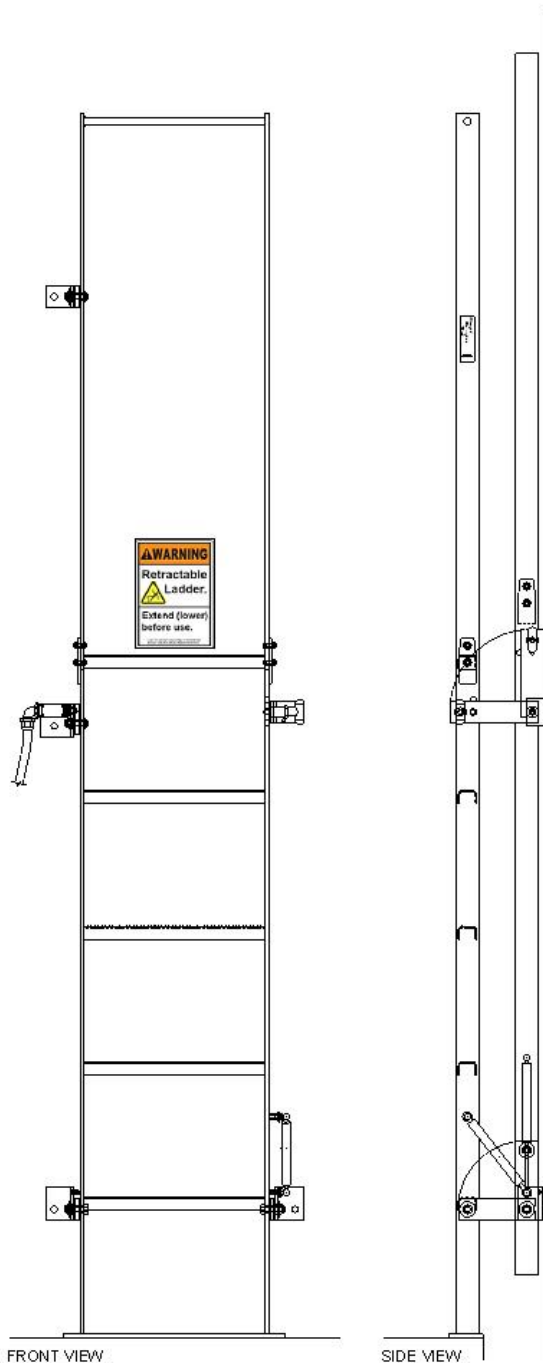

- **\*NEW\*** Enable safer access to overhead machines in MRLs where the reach is too far. The Overhead Retractable Ladder® can be used to reach the machine or a hoistway platform from the car top
- 2 3/4" wall to outside of ladder when retracted for exceptionally tight car to hoistway clearance
- 7" rung-to-wall when extended for full OSHA and ASME A17.1-1996 - 2013 compliance
- All Retractable Ladders® extend 4' above the top rung to provide handholds per OSHA standards
- Climbing portion of the ladder available in 1' (#ORL12) thru 12' (#ORL144) lengths. 16", 12" & 9" wide rungs are standard; nonstandard sizes available upon request
- Electrical Protective Device per A17.1-2007/13, 2.26.2.38 field wired into the elevator safety circuit prevents elevator operation when ladder is extended, positive break N.C. contact, NEMA 4X (IP67) standard
- Traction Tread™ rungs, slip-resistant & self-cleaning for ideal multi-direction grip and exceptional strength
- Gas spring reduces force required to extend or retract ladder to less than 10 lbf (< 50 lbf code)
- Pull pin with secure grip T-handle to extend & retract ladder and mechanically secure it in both positions. Pull-pin can be mounted on either side (specify upon ordering)
- OSHA Safety Yellow powder coat painted for optimal visual safety and rust protection
- Modular design for ease of handling and reduced shipping cost
- Retractable Ladder® is a Registered Trademark and has been awarded US Patent #8944211
- Made with pride in the USA

**Smart Elevator Tech, LLC**

phone: (415) 819-5744

email: [margaret@smartelevatortech.com](mailto:margaret@smartelevatortech.com)

web: [www.smartelevatortech.com](http://www.smartelevatortech.com)